


# 200 plus series consoles

## Portable Control System

The 200 plus series consoles are the latest in a long line of enhanced manual lighting desks from Philips Strand Lighting. The consoles feature Ethernet and DMX ports as well as a video display port for users needing more information than is provided by the on panel LCD display.

Easy to set up and use the 200 plus series consoles are ideal for any application that needs manual and memory control.

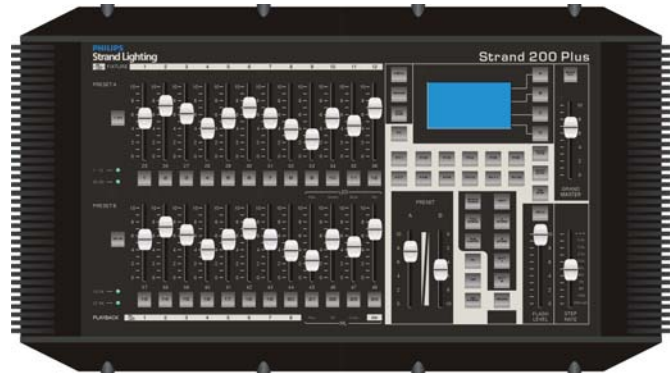

200 plus series 12/24 Lighting Control Console

### Features - 200 plus 12/24 console

- Six available operation modes: Single Scene, Two Scene, Submaster, Moving Light, LED and FX Playback.
- 12 Pages of Submasters
- Each Submaster page has 24 Submasters
- Total Submasters is 288
- 12 FX stacks
- Each FX stack can have 48 steps
- FX stacks can be previewed on system faders
- Total number of recordable steps is 576
- 12 Moving lights
- 12 LED lights
- Show files, console contents can be saved on a USB drive
- Two trigger buttons for external DMX512 devices
- You can record a full 512 channels into the DMX512 base memory
- 512 total DMX512 outputs
- DMX512 input recorder with 12 memories
- Integrated video display port
- CE Marked (power supply is ETL/UL)

### Features - 200 plus 24/48 console

- Six available operation modes: Single Scene, Two Scene, Submaster, Moving Light, LED and FX Playback.
- 24 Pages of Submasters
- Each Submaster page has 48 Submasters
- Total Submasters is 1152
- 12 FX stacks
- Each FX stack can have 96 steps
- FX stacks can be previewed on system faders
- Total number of recordable steps is 1152
- 24 Moving lights
- 24 LED lights
- Show files, console contents can be saved on a USB drive
- Two trigger buttons for external DMX512 devices
- You can record a full 512 channels into the DMX512 base memory
- 1024 total DMX512 outputs
- DMX512 input recorder with 12 memories
- Integrated video display port
- CE Marked (power supply is ETL/UL)

**PHILIPS**  
**Strand Lighting**

SPECIFICATION SUBMITTAL

CONSULTANT: <input type="text"/>	PROJECT NAME: <input type="text"/>	MODEL NUMBER   QUANTITY: <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
DATE: <input type="text"/>	PROJECT NUMBER: <input type="text"/>	APPROVED BY: <input type="text"/>

**Introduction**

Strand Lighting's new 200 plus series consoles offer you a choice of 24 or 48 submasters plus conventional preset operation. Choose either submaster, two scene or expanded single scene operation on the fly to meet the needs of your production.

We did not forget the latest generation of LED luminaires either with a full suite of controls for multi-color LED luminaires. The console will also run up to 24 moving lights allowing you complete control of both conventional dimmers and a host of sophisticated next generation luminaires.


The 200 plus console also features 12 Effects playbacks with each


effect having up to 48 steps. Effects are easy to access, record and change dynamically. All show information can be saved to a USB memory device to give you a secure back up of your show.

New to the 200 plus console is a new DMX512 capture function allowing you to capture up to 512 channels of DMX512 from a larger console and play them back. There are 12 memories available.

Simple to use and set up with a wide range of features, the 200 plus series consoles are an ideal choice for facilities that need a compact and effective lighting controller.

**200 plus series 12/24 console**


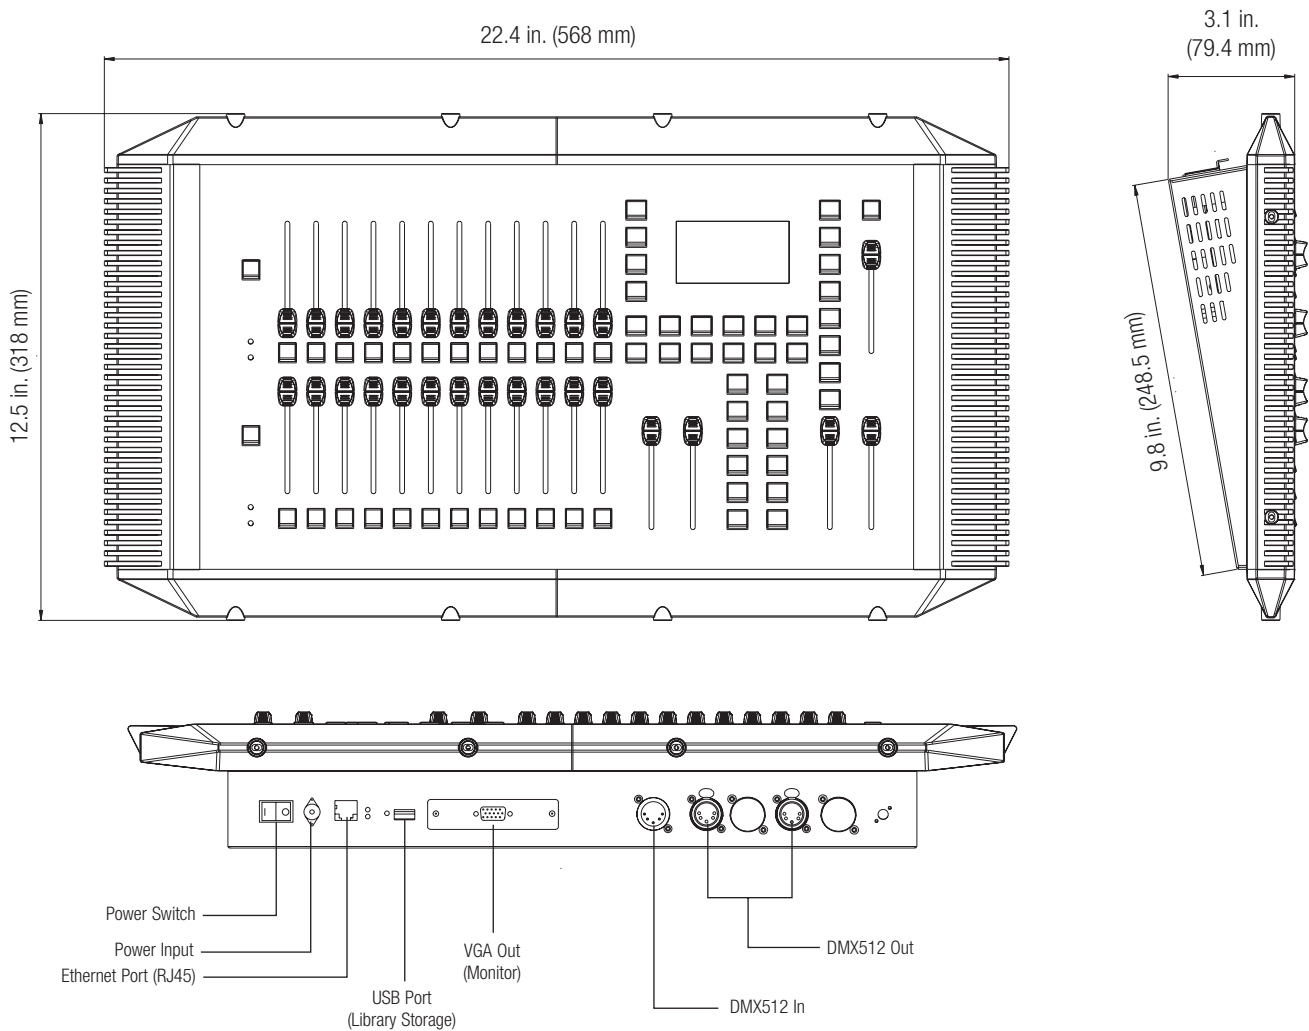


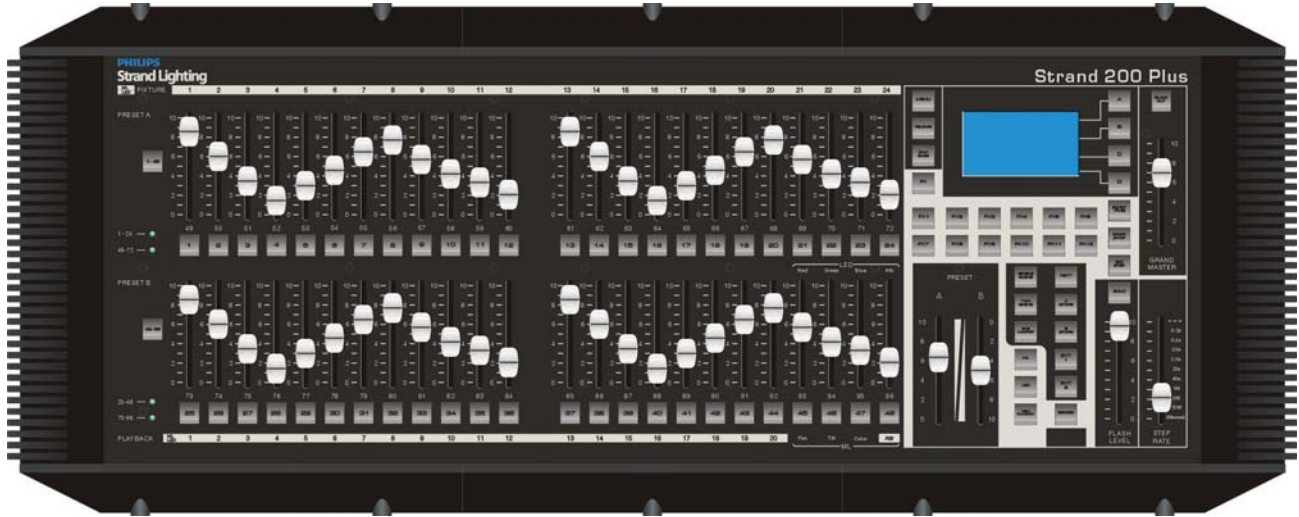


200 plus series 24/48 Lighting Control Console

200 plus series 24/48 console

31.7 in. (804 mm)

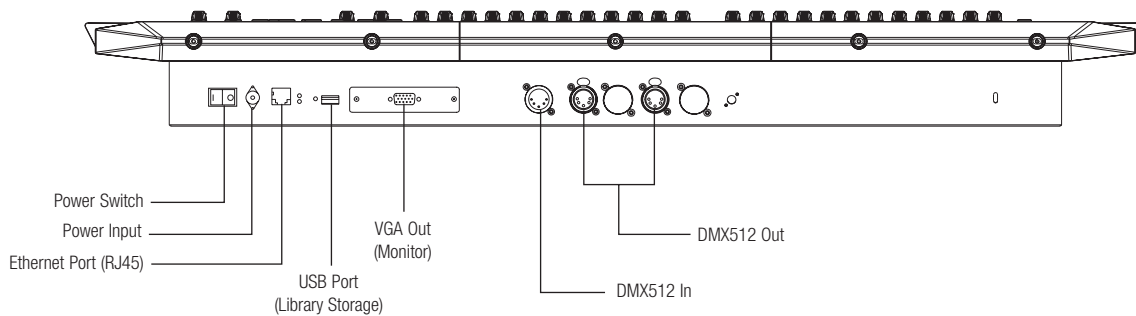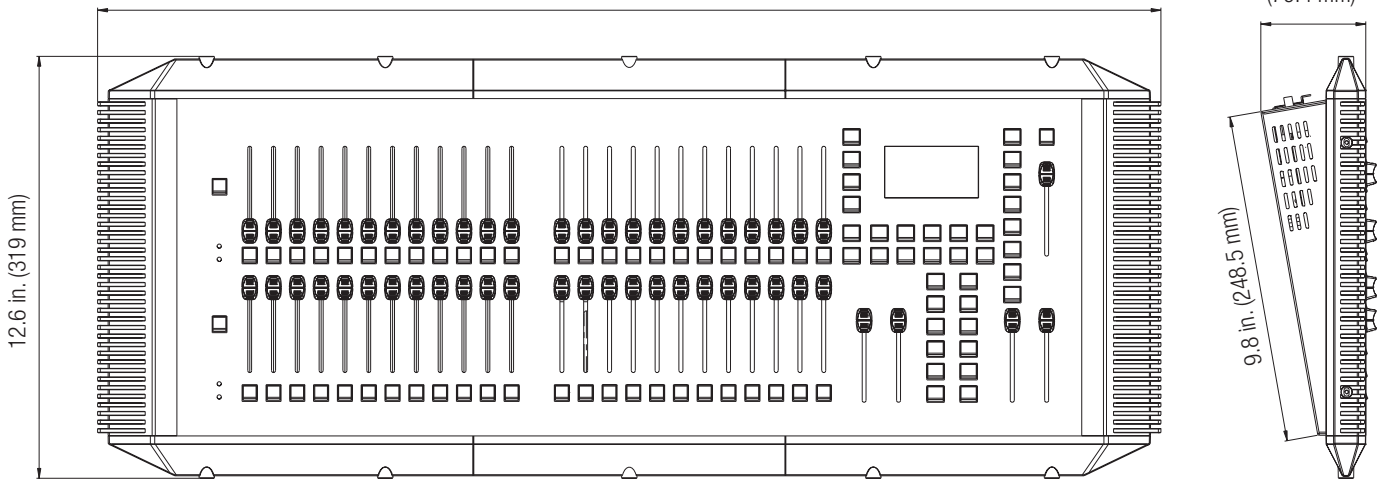

Technical Specifications		Dimensions (LxWxH):	
<b>Electrical</b>		<b>200 plus 12/24</b>	22.4 x 12.5 x 3.1 in 568.0 x 318.0 x 79.4 mm
<b>Supply Voltage:</b>	Universal power supply 90-240V	<b>200 plus 24/48</b>	31.7 x 12.6 x 3.1 in 804.0 x 319.0 x 79.4 mm
<b>Approvals:</b>	CE marked with UL listed and cUL power supply		
<b>Mechanical</b>		<b>Connectivity</b>	
<b>Construction:</b>	Rigid folded sheet steel and Flame retardant ABS controls	1	Ethernet (RJ45) port, ArtNet compatible
<b>Operating Temperature:</b>	0° to 40°C ambient (32° to 104°F)	1	USB port (Library Storage - USB key sold separately)
<b>Humidity:</b>	0% - 95% non-condensing	1	VGA monitor outputs (monitors not included)
<b>Storage Temperature:</b>	0° to 35°C (32° to 95°F)	1	DMX512 In (XLR5M) port
<b>Weight:</b>		2	DMX512 Out (XLR5F) ports
			
<b>200 plus 12/24</b>	15.0 lbs (6.8 kgs)		
<b>200 plus 24/48</b>	21.0 lbs (9.5 kgs)		

**Ordering Information**

**Cat. No. Description**

200 plus series Consoles		Accessories	
<b>64331</b>	200 plus series 12/24 Console	<b>64335</b>	Spare Dust Cover (200 plus series 12/24)
<b>64341</b>	200 plus series 24/48 Console	<b>64345</b>	Spare Dust Cover (200 plus series 24/48)
<b>67528</b>			USB Key Drive
<b>95207</b>			19-inch Flat Panel Monitor
<b>Includes:</b>	All consoles include dust cover, integrated video (VDU) card, universal voltage power supply, and printed installation guide. Monitors not included.		
<b>Peripheral Equipment - Cables</b>			
<b>95090</b>	DMX512 Control Cable 25' (A5F to A5M)		
<b>96456</b>	Ethernet cable 10' 10/100BaseT (RJ-45)		
<b>96459</b>	Ethernet cable 25' 10/100BaseT (RJ-45)		

**Philips Strand Lighting**

**Dallas**  
10911 Petal Street  
Dallas, TX 75238  
Tel: (214) 647-7880  
Fax: (214) 647-8031

**New York**  
267 5th Ave, 4th Floor  
New York, NY 10016  
Tel: (212) 213-8219  
Fax: (212) 532-2593

[www.strandlighting.com](http://www.strandlighting.com)  
© Philips Group 2011  
All rights reserved.  
The Company reserves the right to make any variation in design or construction to the equipment described. E&OE

**Auckland**  
19-21 Kawana Street  
Northcote, Auckland 0627  
New Zealand  
Tel: + 64 9 481 0100  
Fax: + 64 9 481 0101

**Asia**  
Unit C, 14/F,  
Roxy Industrial Centre  
No. 41-49 Kwai Cheong Road  
Kwai Chung, N.T., Hong Kong  
Tel: + 852-2796-9786  
Fax: + 852-2798-6545

**Europe**  
European Service & Distribution Centre  
Marssteden 152  
Enschede 7547 TD  
the Netherlands  
Tel: +31-53-4500424  
Fax: +31-53-4500425