

Propack

12 Channel Rack Mount Dimmer (120V)

The Propack dimmer provides high-density, high-power dimming in a compact 2U rack mount package. Each Propack dimmer features twelve 2000-Watt dimmers with either two Socapex or twelve Stage Pin output connections to meet a wide range of applications.

All Propack dimmers feature our popular flat front circuit breakers that provide clear tripped-status indication and have no toggle handles that protrude past the frame that can break off.

Control is supplied with our digital processor; which is simple to setup and use.



Propack 12 Channel Rack Mount Dimmer


Features

- Compact 2U High Rack Mount Design
- Twelve 2000-Watt Dimmers
- DMX512 In and Out
- Phase and Over-temperature Indicators
- Simple Set Up and Operation
- Digital Control Electronics
- Mux Fail Hold
- Flat Front Rocker Style Fully Magnetic Circuit Breakers
- Twelve Stage Pin or Two Socapex Output Configurations
- CE Marked and CSA Listed
- Black Finish


PHILIPS
Strand Lighting

SPECIFICATION SUBMITTAL


CONSULTANT: <input type="text"/>	PROJECT NAME: <input type="text"/>	MODEL NUMBER QUANTITY: <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
DATE: <input type="text"/>	PROJECT NUMBER: <input type="text"/>	APPROVED BY: <input type="text"/>

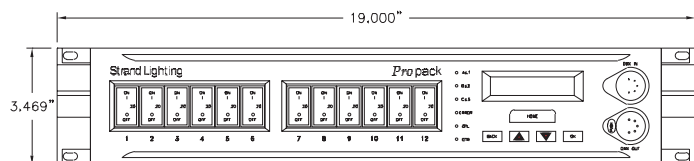


Front View

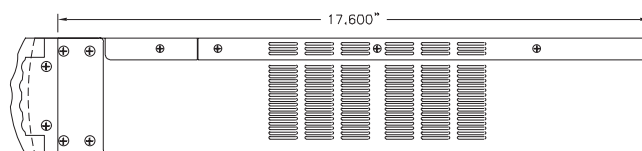

Side View

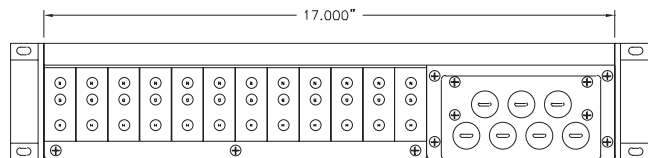

75332 Rear View

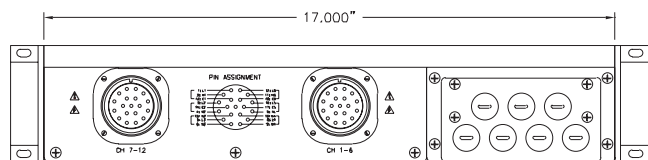

75333 Rear View

Technical Specifications		Mechanical Data	
Supply Voltage:	100 - 120VAC, 3 phase	Weight:	34 lbs (approx.)
Output Voltage:	100 - 120VAC, 60 Hz	Dimensions:	3.75 (H) x 19 (W) x 18 (D) in
No. of Dimmers/Unit:	12	DMX512 Connections:	DMX512 In / Out (thru)
Load per Dimmer:	2.0kW (20A max.)	Finish:	Black
Capacity per Unit:	24kW (max)		
Load Connections:			
75332:	Stage Pin (12 each)		
75333:	Socapex (2 each)		
		Environmental Data	
		Temperature:	32 to 99°F
		Humidity Range:	60 to 90% (non-condensing)

Ordering Information

Cat No. Description

Propack Dimmers	
75332	Propack, 12x20A, 120V Stage Pin Connector (x12)
75333	Propack, 12x20A, 120V Socapex (x2)

Philips Strand Lighting

Dallas
10911 Petal Street
Dallas, TX 75238
Tel: +1 (214) 647-7880
Fax: +1 (214) 647-8031

New York
267 5th Ave, 4th Floor
New York, NY 10016
Tel: +1 (212) 213-8219
Fax: +1 (212) 532-2593

www.strandlighting.com
© Philips Group 2012
All rights reserved.
The Company reserves the right to make any variation in design or construction to the equipment described. E&OE

Auckland
19-21 Kawana Street
Northcote, Auckland 0627
New Zealand
Tel: +64 9 481 0100
Fax: +64 9 481 0101

Asia
Unit C, 14/F,
Roxy Industrial Centre
No. 41-49 Kwai Cheong Road
Kwai Chung, N.T., Hong Kong
Tel: +852 2796 9786
Fax: +852 2798 6545

Europe
European Service & Distribution Centre
Rondweg zuid 85
Winterswijk 7102 JD
the Netherlands
Tel: +31 (0) 543-542516