



# Toru Long Throw Followspot 4° – 8°

The Performer Series of Followspots define a new standard of performance, ergonomics and operator comfort. Simple to operate using the full-length side and rear guide handles, adjustable fixture balance and Selecon’s unique clutch cone tilt and pan system. Operator comfort is assured by the ergonomic control suite and exhaust system which removes the lamp heat away from the operator.

Light output is over double that of similar wattage lamps with excellent even beam quality, adjustable to peak distribution as required. This unmatched performance is the result of utilizing the latest in short-arc technology, Selecon’s light collection expertise and large multi-coated lenses.



### Features

- TORU features an electronic flicker-free power supply (110V–260V), six-color changer, full control suite and is supplied with a lamp and a winch-operated, tripod-based stand
- Precision engineered pan/tilt cone system adjustable balance to suit operator’s preference
- Ergonomic control layout minimizes operator stress – comfortable and simple to operate
- Lenses operate individually to set the beam angle and focus
- Cool beam technology removes heat away from the operator while reducing stress on internal components
- Full suite of operator controls including – iris; mechanical dowser, CTO filter, diffusion frost and two cutters
- Integrated 6-color changer
- Electronic variable light output, 60–100% to suit your show or application
- Peak/flat beam light distribution control



### SPECIFICATION SUBMITTAL

CONSULTANT <input type="text"/>	PROJECT NAME: <input type="text"/>	MODEL NUMBER   QUANTITY: <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
DATE: <input type="text"/>	PROJECT NUMBER: <input type="text"/>	APPROVED BY: <input type="text"/>

# Toru Long Throw Followspot 4°– 8°


# Theatrical Luminaires

## Photometric Data

Tests conducted using the Philips 1400W lamp

Flat cd at 4° - 9,400,000      Flat cd at 8° - 3,800,000

100fc at 4° – 306ft              100fc at 8° – 195ft

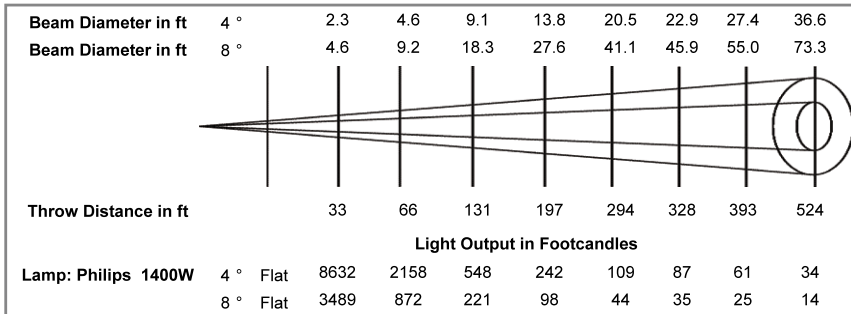

## Lamp: 110V-260V

**MSRMINIQF**      1400W Mini MSR Gold Lamp  
with Fast-Fit Base (Philips)  
9281 746 05100  
color temperature: 6100K

## Power Supply:

**Electronic, flicker free**

**Input Voltage:** 110V-260V. 47-63hz. 1400W.


**Dimming Range:** 60-100%

**Power Factor:** 0.98

## Physical Data

**Fixture Weight including stand:** 238 lbs

**Without stand:** 210 lbs

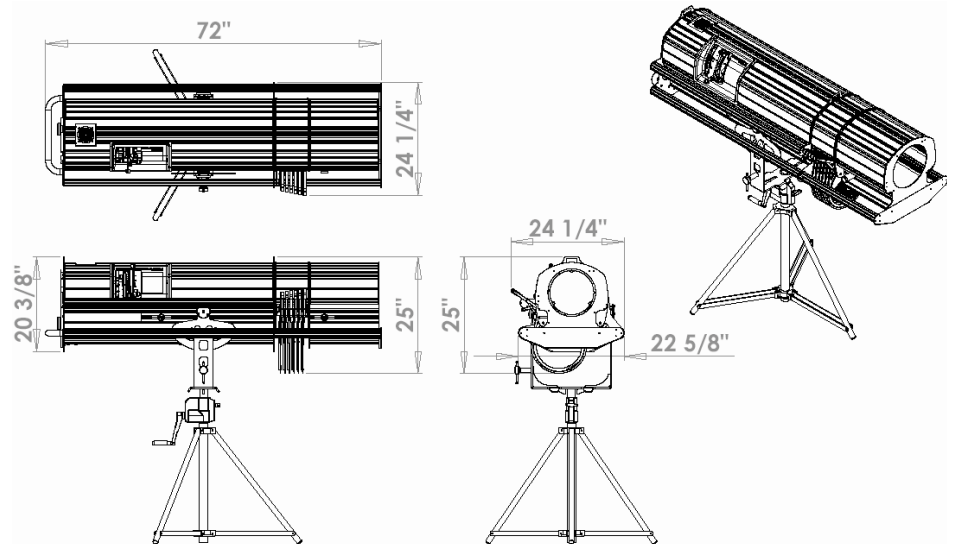

## Ordering Information

**Cat No              Description**

<b>27FSTORU</b>	Performer Series Toru Followspot supplied with tripod stand and lamp	<b>28FSSTWHEELS</b>	Set of 3 locking casters for Performer Series Followspots
<b>28FSPH</b>	Gobo holder – B size		

## Philips Strand Selecon Lighting

### Los Angeles

6603 Darin Way  
Cypress, CA 90630  
Tel: (714) 230-8200  
Fax: (714) 899-0042

### New York

267 5th Ave, 4th Floor  
New York, NY 10016  
Tel: (212) 213-8219  
Fax: (212) 532-2593

### Dallas

10911 Petal Street  
Dallas, TX 75238  
Tel: (214) 647-7880  
Fax: (214) 647-8030

### www.strandselecon.com

© Philips Group 2009  
All rights reserved.  
The Company reserves the right  
to make any variation in design or  
construction to the equipment  
described. E&OE

### Auckland

19-21 Kawana Street  
Northcote, Auckland 0627  
New Zealand  
Tel: + 64 9 481 0100  
Fax: + 64 9 481 0101

041509NA

### Asia

Room 6-10,  
20/F Delta House  
3 On Yiu Street  
Shatin, N.T. Hong Kong  
Tel: + 852-2757-3033  
Fax: + 852-2757-1767

### Europe

Unit 2 Royce Road,  
Fleming Way  
Crawley,  
West Sussex RH10 9JY  
Tel: + 44 (0) 1293-554010  
Fax: + 44 (0) 1293-554019

### Europe

European Service & Distribution Centre  
Marssteden 152  
Enschede 7547 TD  
the Netherlands  
Tel: +31-53-4500424  
Fax: +31-53-4500425

**PHILIPS**

**Strand • Selecon**  
L I G H T I N G