

Emergency DMX Bypass Switch



96250 Emergency DMX Bypass Switch


Philips Strand Lighting’s Emergency DMX Bypass Switch provides Emergency and Panic Lighting control solutions for DMX driven house lights and DMX controlled lighting used in emergency and egress lighting. Each Bypass unit can handle up to four (4) individual universes of DMX and can also act as a DMX splitter handling 1 in 4 out or 2 in 2 out routing scenarios. Bypass handles more than just Emergency and has separate triggers for Panic situations as well.

Each state – Panic or Emergency, can be set to trigger “snap shot” loads or can be set to drive all loads on each DMX path to 100%. Each state (Panic or Emergency) can be triggered via normally open, normally closed dry contacts, or from a 12VDC signal. Once the State is returned to Normal Bypass will also return loads to the DMX controller in a very smart fashion.

Return states can be timed at 1 minute, 10 minutes, or can be set to return under INTELLIGENT timing. INTELLIGENT timing will truncate the return to normal time when valid DMX inputs are sensed. This device is a simple affordable solution for all of your DMX Emergency and Panic systems needs.


Features

- Accepts Up To Four (4) DMX Universes
- Emergency Input
- Panic Input
- Integrated DMX Splitter with User-Selectable Operational Settings
- Emergency and Panic Test Buttons
- Durable, steel construction that easily mounts near lighting control panels or inside 19-inch racks
- Designed and manufactured in the USA

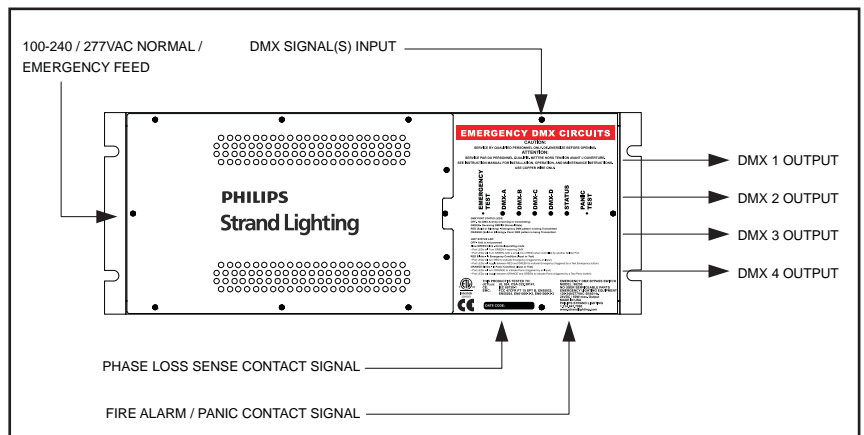

SPECIFICATION SUBMITTAL

CONSULTANT: <input type="text"/>	PROJECT NAME: <input type="text"/>	MODEL NUMBER QUANTITY: <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
DATE: <input type="text"/>	PROJECT NUMBER: <input type="text"/>	APPROVED BY: <input type="text"/>

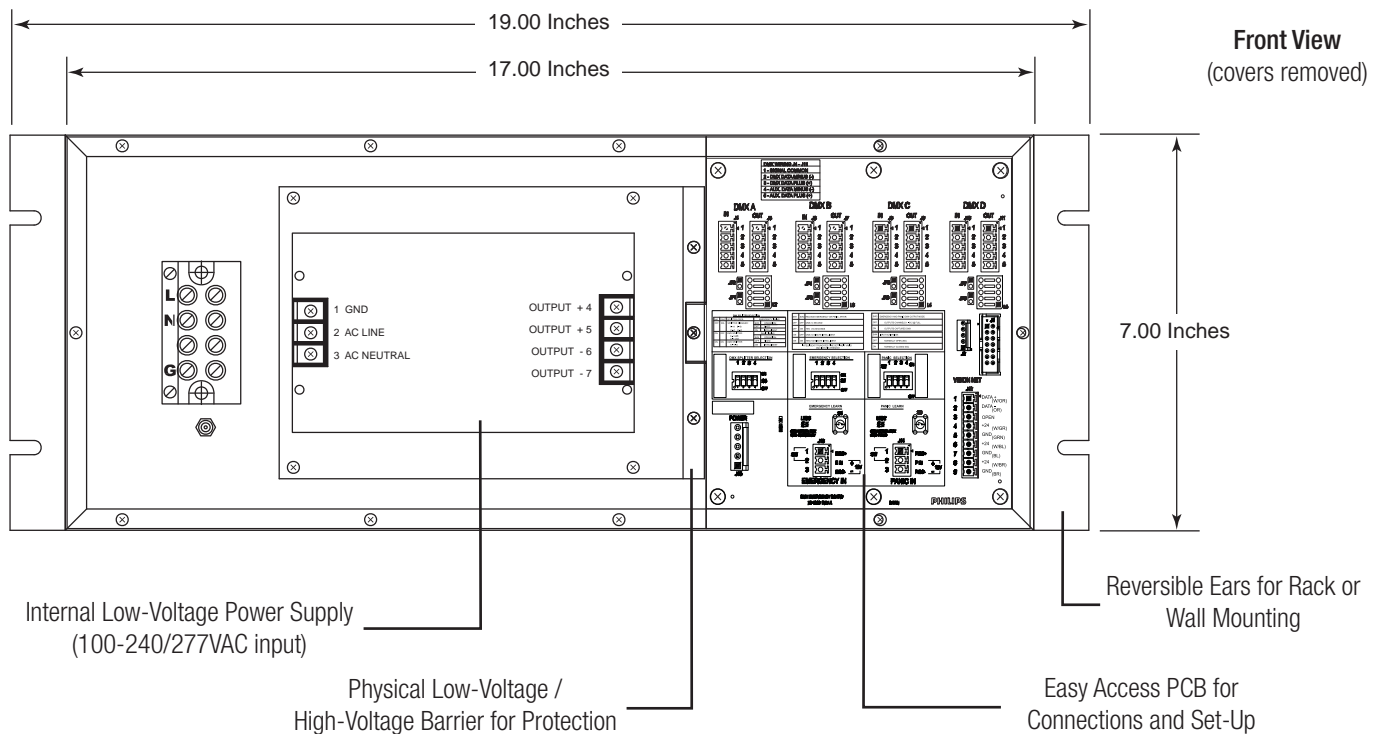

Specifications

Operational Specifications

Power Input: 100-240/277VAC, 50-60Hz, 1 Phase
 Output Power: 24VDC, 1.75 A
 DMX Universes (Input): 4
 DMX Universes (Output): 4
 Panic (Input): 1
 Emergency (Input): 1

Mechanical Specifications

Enclosure: Steel (Indoor Use Only)
 Color: Black
 Mounting: Surface Mount or Rack Mount (Using
 Included Mounts)
 Weight: 9.7 lbs (4.4 kg)

Environmental Specifications

Compliance:
 cETLus: UL 924, CSA C22.2#141,
 CE: IEC 60730-1
 EMC: FCC 47CFR PT 15 SPT B, EN55022,
 EN55024, EN61000-3-2, EN61000-3-3
 Operating Temperature: 0° to 25° C
 Operating Humidity: 5 to 95% Non-condensing



Ordering Information

Cat No. Description

Emergency DMX Bypass Switch

96250 Emergency DMX Bypass Switch

Philips Strand Lighting

Dallas
 10911 Petal Street
 Dallas, TX 75238
 Tel: +1 (214) 647-7880
 Fax: +1 (214) 647-8031

Auckland
 19-21 Kawana Street
 Northcote, Auckland 0627
 New Zealand
 Tel: + 64 9 481 0100
 Fax: + 64 9 481 0101

www.strandlighting.com
 © Philips Group 2015

All rights reserved.
 The Company reserves the right to make any variation in
 design, construction or descriptions contained herein,
 of the equipment, at any time without prior notice. E&OE

Asia
 Unit C, 14/F,
 Roxy Industrial Centre
 No. 41-49 Kwai Cheong Road
 Kwai Chung, N.T., Hong Kong
 Tel: +852 2796 9786
 Fax: +852 2798 6545

Europe
 European Service & Distribution Centre
 Rondweg zuid 85
 Winterswijk 7102 JD
 the Netherlands
 Tel: +31 (0) 543-542516