



301 BACKUP CONSOLE



PORTABLE OR RACK MOUNTING CONTROL SYSTEM


The 301 console is a versatile multifunction console that may be used as a backup to any DMX512 lighting system and as a manual desk. It may also be used as a timed event controller. Capable of storing up to 144 cues on 12 memory pages, the 12 manual faders on the 301 offer simple and intuitive operation as a backup for any DMX512 lighting console. Unit may be used table top or rack mounted.



301 BACKUP CONSOLE

FEATURES

- Multi-function control system may be used as a Backup, Timed Event Controller or Manual Console
- Simple to program and set up
- Backup mode features 12 Pages of 12 Backup looks standard for a total of 144 Backup cues
- Time clock mode with 12 events ideal for Stage
- Manager panel applications
- 12 channel manual control with DMX512 patch
- 12 faders with master and page controls
- LCD display for set up and configuration
- 12 analog inputs
- DMX512 input indicator with audible failure warning
- Automatic DMX512 bypass on system failure
- Designed for table or rack mounting
- International power input cables provided with U.S., UK and Schuko connectors

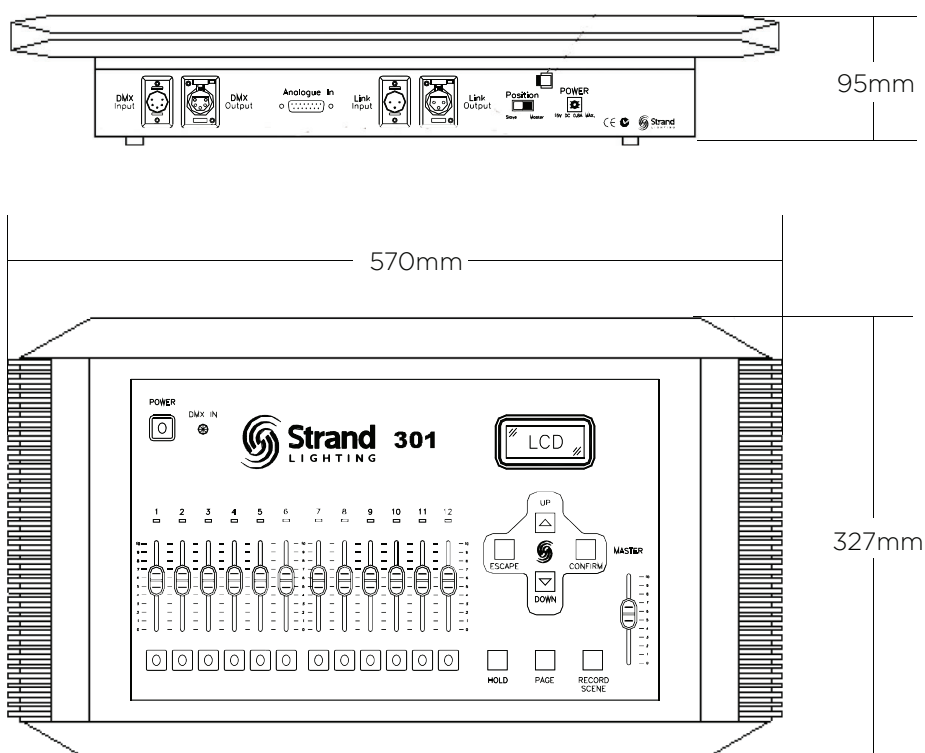



301 BACKUP CONSOLE

POWER

Operating voltage 100-240V

CONNECTIVITY

DMX512 In / out 5-pin XLR connector

Analogue 12 contact closures

Link 3-pin XLR connector in / out

Power Cable and backup battery

PHYSICALS

Finish Blue powder coat epoxy paint

Construction Rigid folded sheet steel

IP rating IP 20

ENVIRONMENT

Ambient temperature °C 0-35 °F 32-95

Humidity 0% - 90% non-condensing

DIMENSIONS

L x W x H mm 570 x 327 x 95 in 22.4 x 12.9 x 3.7

WEIGHT

Console only kg 4.0 lb 8.8

WARRANTY & APPROBATIONS

Warranty 2 years

Approvals / Listings CE marked, UL, cUL listed

PRODUCT NAME

ORDER CODE

301 Backup control system, 100-240V

91714

301 Dust Cover

61315

© 2019 Signify Holding. All rights reserved.

All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.

Ref: 91714-100-00

WWW.STRANDLIGHTING.COM